



Kolonne

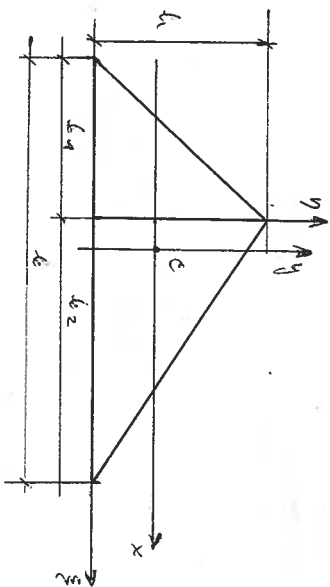

$$I_z = \frac{b h^3}{12} \quad , \quad I_x = \frac{b h^3}{36} \quad , \quad I_y = \frac{h}{12} (b_1^3 + b_2^3)$$

Vertikale Kolonnenprofil $b_1 = b_2 = \frac{b}{2}$ & $y \equiv y \Rightarrow$
 $\Rightarrow I_y = I_y = \frac{h b^3}{48}$

Träsnurkolonne

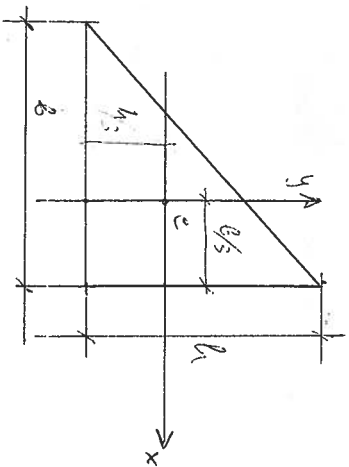

$$I_{xy} = \pm \frac{b^2 h^2}{72}$$




TABLE D/4 PROPERTIES OF HOMOGENEOUS SOLIDS
 (m = mass of body shown)

BODY	MASS CENTER	MASS MOMENTS OF INERTIA
<p>Circular Cylindrical Shell</p>	—	$I_{xx} = \frac{1}{2} m r^2 + \frac{1}{12} m l^2$ $I_{x_1 x_1} = \frac{1}{2} m r^2 + \frac{1}{3} m l^2$ $I_{zz} = m r^2$
<p>Half Cylindrical Shell</p>	$\bar{x} = \frac{2r}{\pi}$	$I_{xx} = I_{yy} = \frac{1}{2} m r^2 + \frac{1}{12} m l^2$ $I_{x_1 x_1} = I_{y_1 y_1} = \frac{1}{2} m r^2 + \frac{1}{3} m l^2$ $I_{zz} = m r^2$ $\bar{I}_{zz} = \left(1 - \frac{4}{\pi^2}\right) m r^2$
<p>Circular Cylinder</p>	—	$I_{xx} = I_{yy} = \frac{1}{2} m r^2 + \frac{1}{12} m l^2$ $I_{x_1 x_1} = \frac{1}{2} m r^2 + \frac{1}{3} m l^2$ $I_{zz} = \frac{1}{2} m r^2$
<p>Semicylinder</p>	$\bar{x} = \frac{4r}{3\pi}$	$I_{x_1 x_1} = I_{y_1 y_1} = \frac{1}{2} m r^2 + \frac{1}{3} m l^2$ $I_{zz} = \frac{1}{2} m r^2$ $\bar{I}_{zz} = \left(\frac{1}{2} - \frac{16}{9\pi^2}\right) m r^2$
<p>Rectangular Parallelepiped</p>	—	$I_{xx} = \frac{1}{12} m (a^2 + l^2)$ $I_{yy} = \frac{1}{12} m (b^2 + l^2)$ $I_{zz} = \frac{1}{12} m (a^2 + b^2)$ $I_{x_1 y_1} = \frac{1}{12} m b^2 + \frac{1}{3} m l^2$ $I_{x_2 y_2} = \frac{1}{3} m (b^2 + l^2)$